


EMI Suppressors -TR6H Series



TR6H Series




Description:

- Rugged construction .
- Counter measures for FCC,VDE..
- CSA,CE,VCCI
- EMI/RFI Suppression
- High reliability
- Long term stability

Applications:

- Telecommunication equipment.
- Wireless communication equipment
- Computer products
- General electronic applications where EMI/RFI suppression is required.

Product Identification


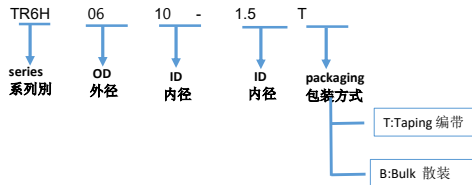


形状与尺寸 Shape and Dimensions in mm

1.立式六孔磁珠Radial R6H bead

Naming:TR6H0610-3.0T


尺寸及图示 Dimensions and drawings



A/B	D	d	P	P0	P1	H1	H1	W	W0	ΔH
6.0±0.3	10.0±0.5	0.5±0.05	5.0±0.5	12.7±0.3	12.7±1.0	18.0±1.0	18.0±0.75	18.0±0.75	13.0±1.0	0±0.5

2.卧式六孔磁珠Radial R6H bead

Naming:TR6H0610-3.0B

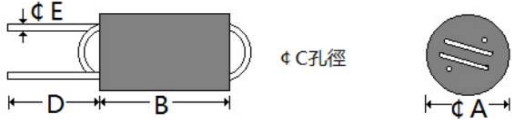

Electrical Characteristics

Part No.	Z(Ω) at 100MHZ typ.	TURNS	DIMENSIONS(mm)					WINDING DIAGRAM
			ΦA	B	ΦC	D(ref)	ΦE	
TR6H0610-1.5B	360	1.5TS	6.0±0.5	10.0±0.3	1.0±0.1	20.0±2.0	0.5±0.1	
TR6H0608-1.5B	450	1.5TS			0.8±0.1			
TR6H0610-2.0B	490	2TS			1.0±0.1			
TR6H0608-2.0B	650	2TS			0.8±0.1			
TR6H0610-2.5B	710	2.5TS			1.0±0.1			
TR6H0608-2.5B	880	2.5TS			0.8±0.1			
TR6H0610-3.0B	850	3TS			1.0±0.1			
TR6H0608-3.0B	1080	3TS			0.8±0.1			
TR6H0610-2X1.5B	360	2X1.5TS			1.0±0.1			
TR6H0608-2X1.5B	450	2X1.5TS			0.8±0.1			

TEST INSTRUMENT:HP-4191A or HP-4395A